



quick start guide

NASTAVITVE ZA NAPRAVE wBox



app wBox



app wBox



KAZALO


- ▶ Kako uporabljati aplikacijo wBox p. 2

- ▶ Kako konfigurirati novo napravo BleBox p. 4

- ▶ Kako dodati konfiguirano napravo BleBox v drug račun p. 7




1

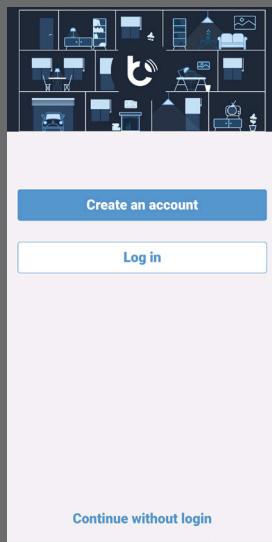

Ob zagonu aplikacije wBox vas bo pozvala, da se prijavite ali ustvarite račun.

Nadaljujete lahko brez prijave, vendar bodo funkcije aplikacije omejene.
Toplo priporočamo, da ustvarite račun ali se prijavite.

2

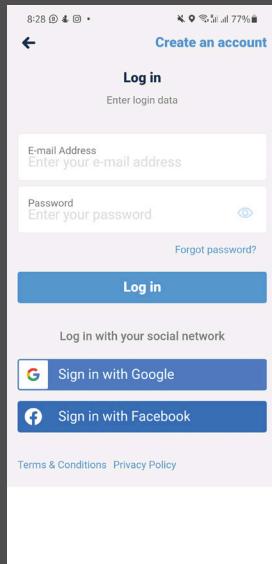


Ustvarite lahko račun BleBox ali se prijavite s svojim Google ali Facebook računom.



Kako uporabljati aplikacijo wBox - Navodila za aplikacijo wBox



3

Ko se prijavite, se samodejno prikaže vadnicavza aplikacijo wBox.

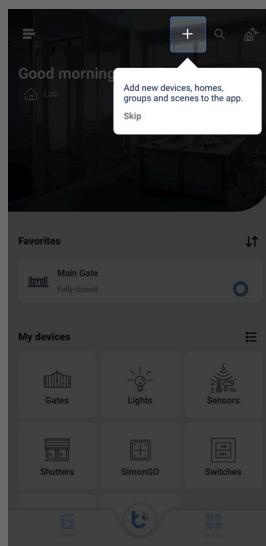

4

»Če ne vidite vadnice, kliknite ikono »meni«.

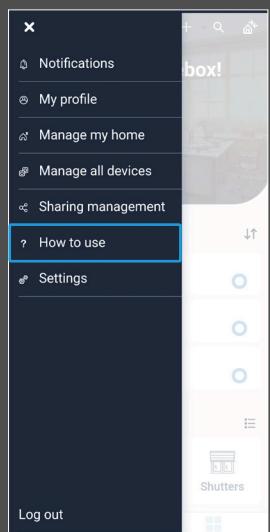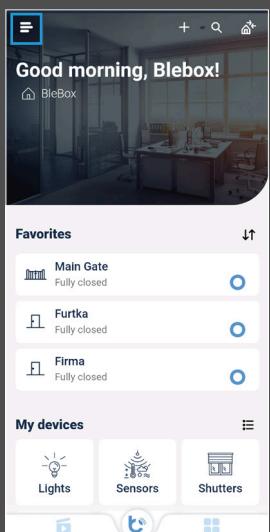



Za začetek vadnice tapnite »Kako uporabljati«.



Kako konfigurirati novo napravo BleBox - Navodila kako dodati novo napravo

5

› Dodaj novo napravo

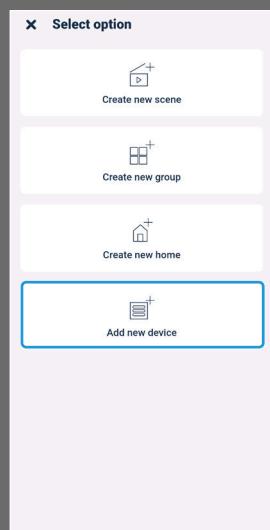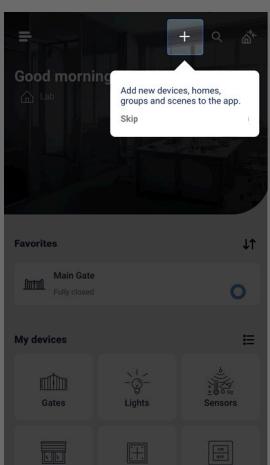

Dotaknite se »Dodaj in nastavi novo napravo«.

Korak (0/12)





Kako konfigurirati novo napravo BleBox - Povežite telefon z WiFi dostopno točko krmilnika

6

Add and set up a new device

- 1 Use the settings app of your phone to connect to the WiFi network emitted by your new device. Make sure that mobile data are off.



- 2 Wait until network scan ends.

- 3 Choose the WiFi network (the name consists of your device type and ID).

Network 1
Network 2
shutterBox

- 4 Connected! Some phones may report that "Internet may not be available" - it's normal.

- 5 Open the wBox app. You will see the "Directly connected devices" section.

- 6 Press the "Add device to account" to add the device to your app.

Direct connection was established to the WiFi network emitted by the device



+ Add device to account

Use only once

With a direct connection, you can use the device only once or add the device to the application using the plus button.

- 7 To return to normal application mode, you just need to disconnect from WiFi network emitted by your new device and reconnect to your WiFi network. The device you just added will be available on your wBox account.


It is recommended to set a password for the WiFi network broadcast by the new device - this option is available in the section "Access Point" in your new device settings.

Sledite navodilom na zaslonu.

> iOS verzija




> Android verzija

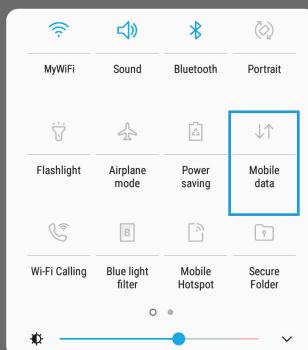

Izklopite mobilno omrežje/mobilne podatke v telefonu.

Korak (1/12)

> Android verzija

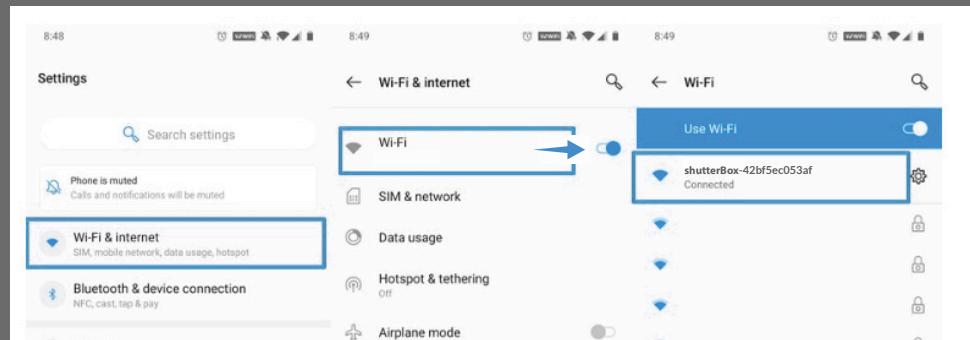

V telefonu izberite nastavite WiFi in vkljopite omrežje WiFi.

Korak (2/12)

Prosimo, povežite se z omrežjem WiFi krmilnika (njegovo AP), ki mora biti imenovan npr.: "shutterBox-42bf5ec053af".

Korak (3/12)

Povezan! Nekateri telefoni lahko poročajo, da »Internet morda ni na voljo« - to je normalno, nadaljujte s tem omrežjem WiFi.

Korak (4/12)

> iOS version





Kako konfigurirati novo napravo BleBox - Konfigurirajte novo napravo BleBox

7

Ko se povežete z omrežjem WiFi krmilnika BleBox, se vrnite v aplikacijo wBox in pojrite na nadzorno ploščo s klikom na "X" v priročniku.

Korak (5/12)

Add and set up a new device

1

Use the settings app of your phone to connect to the WiFi network emitted by the device.

8

Uporabite gumb »+ Dodaj napravo v račun«, da dodate napravo v svoj račun. Zdaj ste postali lastnik naprave.

Korak (6/12)

Uspeh! V svoj račun ste dodali napravo.


Korak (7/12)

9

Izberite »Nadzor te naprave« in sledite nastavitevam povezave, kot je prikazano.

Korak (8/12)

shutterBox



Closed • 59%

Go to favorite position
Closed - 59%

← Settings

shutterBox

Device type

shutterBox

Name and icon

Device settings

Connection

Service connection (AP) Enabled

← Connection

shutterBox

Remote access details

Remote access status DISCONNECTED

Configure

WiFi connection details

WiFi Client status NOT CONFIGURED

Local IP address

Show more information

SELECTED WIFI NETWORK

The device is currently not connected to any WiFi network

AVAILABLE WIFI NETWORKS

BleBoxWiFi



Korak (9/12)

"Super! - Stanje odjemalca WiFi: vzpostavljena povezava! Krmilnik BleBox je povezan z vašim domaćim omrežjem.

Korak (10/12)



Kako konfigurirati novo napravo BleBox - Izklopite ali nastavite geslo za BleBox AP

10

The first screenshot shows the main interface for a device named 'shutterBox' with a status of 'Closed • 59%'. It includes control buttons for up and down movement and a 'Go to favorite position' button.

The second screenshot shows the 'Settings' menu for 'shutterBox'. The 'Connection' section is selected, showing 'Service connection (AP)' set to 'Enabled'. A callout box says 'Pojdite na "Dostopna točka"' and 'Korak (11/12)'.

The third screenshot shows the 'Service connection (AP)' configuration screen. It includes fields for 'AP name' (set to 'shutterBoxshutterBox-42bf5ec053af') and 'Password' (set to '*****'). A blue arrow points from the 'Save' button to a note: 'Ne pozabite tapniti gumb »Shrani«.' A callout box says 'Tu lahko izklopite dostopno točko, da preprečite nepooblaščen dostop...' and 'Step (12/12)'.

11



To je vse!
Za več informacij o vaši
napravi, glejte navodila za uporabo.
Nadaljujte spodaj, če želite
videti, kako deliti
napravo z drugim družinskim članom.



Kako dodati konfiguirano napravo BleBox v drug račun

12

- > Dodajte konfiguirani krmilnik z uporabo drugega pametnega telefona

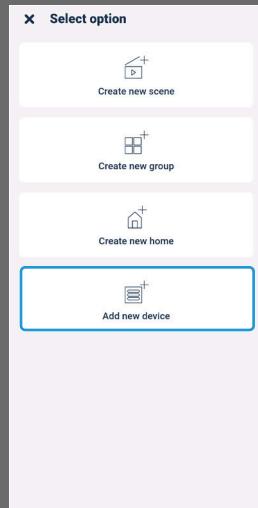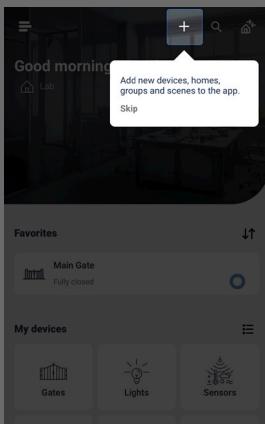

Dotaknite se »Dodaj naprave, ki so že povezane z omrežjem WiFi«.

Korak (1/3)





(2)

13


Ne pozabite tapniti gumba »Shrani«.

Izberite »Poišči naprave« in počakajte, da se skeniranje konča. Ne pozabite, da morate biti povezani z istim omrežjem WiFi kot krmilnik BleBox.

Korak (2/3)

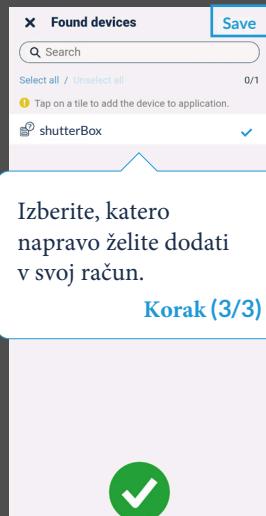

Korak (3/3)

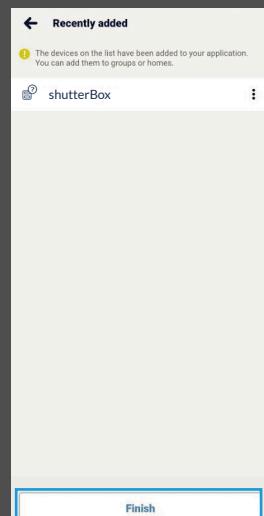

14

To je vse!

Lahko se vrnete na nadzorno ploščo ali dodate krmilnike v določen dom.

Ne pozabite!

Naprave lahko delite tudi prek e-pošte ali μPortala.

